

S3219E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lift
- Compact & nimble
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain



 **snorkel**
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS

S3219E

DIMENSIONS		S3219E
Max. working height		7.79m
Max. platform height (A)		5.79m
Platform size (stowed)		1.61m x 0.71m
Platform size (extended)		2.53m x 0.71m
Deck extension length		0.91m
Overall length (C)		1.79m
Overall width (D)		0.81m
Stowed height (B)		2.09m
Min. height (guardrails folded)		1.65m
Ground clearance (stowed)		66mm
Ground clearance (elevated)		19mm
PERFORMANCE		
Platform capacity (SWL)		250kg
Max. drive height		5.79m
Max. wind speed		12.5m/s
Max. drive speed (stowed)		3.2km/h
Max. drive speed (elevated)		0.6km/k
Gradeability		25%
Inside turning radius		0.10m
Outside turning radius		1.63m
Tires		non-marking solid rubber
Controls		proportional
Drive system		2 wheel drive
POWER		
Power source		4 x 6V 220amp hour batteries
Charger		90 - 240V, 25amp
WEIGHT		
Weight		1,564kg

TURNING RADIUS

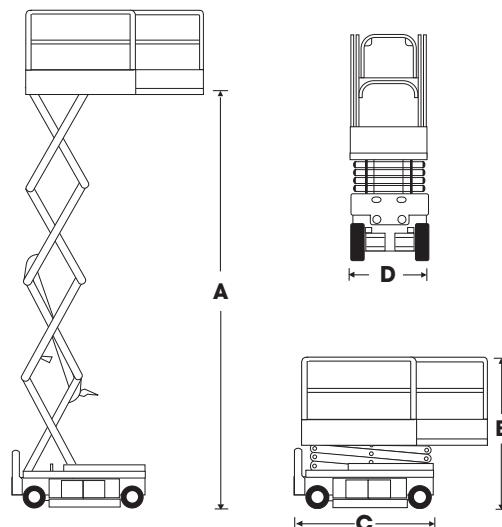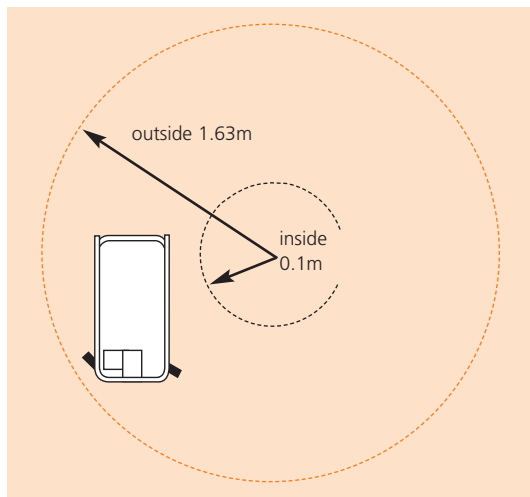

STANDARD FEATURES

- Roll-out deck extension with locking handles
- Non-marking tyres
- Swing-out service trays
- Saloon door entry
- Key switch
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Proportional controls
- Power line to platform
- Hour meter & onboard diagnostics display
- Dual lanyard attachments points
- Flashing amber light
- Operators manual
- 1 year parts & labour, 5 years structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental (green) oil

snorkel

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales@snorkellifts.com

www.snorkellifts.com